


Key Features:

- No metal parts, hence non-conductive rather than insulated, meaning it is inherently unable to carry a current.
- Proof tested up to 20kV for use in Low Voltage (up to 11kV) and Medium Voltage (up to 20kV) applications.
- Tape is constructed of highest quality FRP – Fibre Reinforced Plastic material. As with a standard tape measure, the tape should not be abused. The tape will tear if subjected to a large enough shear force and will weaken if folded due to the mechanical properties of the FRP material. The material will not stretch and when used correctly will allow years of use.
- Total weight: 150g.
- Standard length: 3m.
- Case dimensions approx. 83mm x 73mm x 29mm.

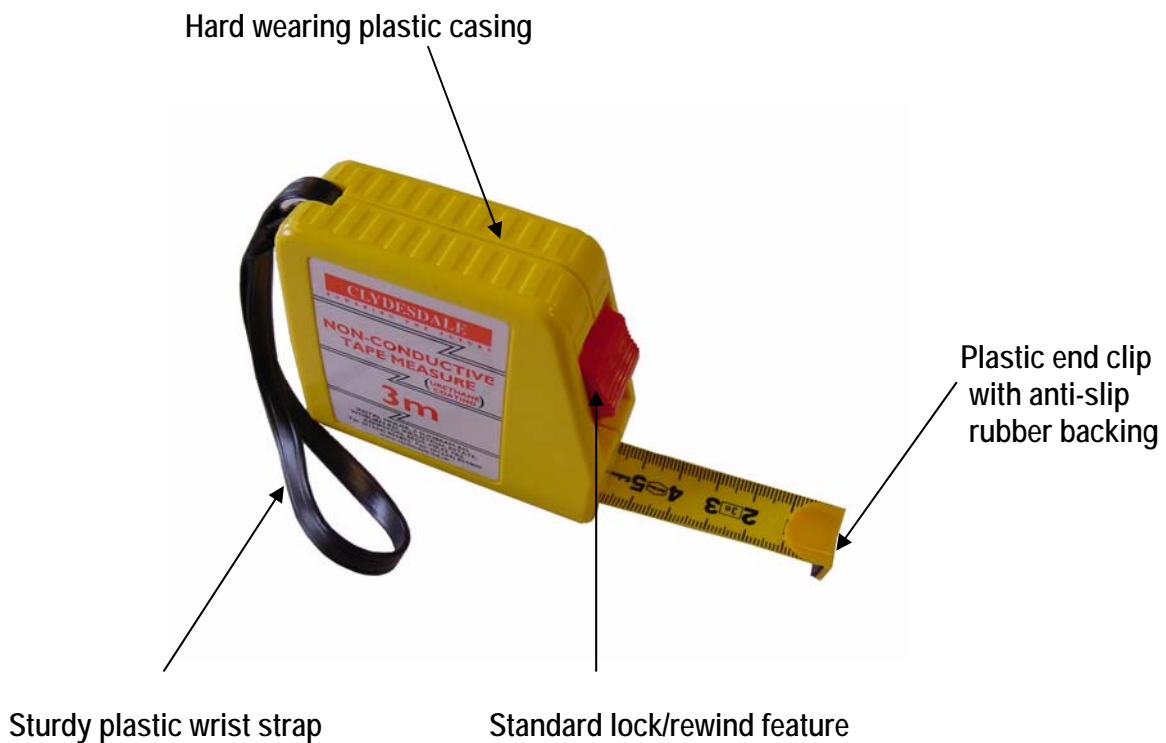

Clydesdale Ltd.

Instal House, 3 Sunbeam Road,
Woburn Road Ind. Est., Kempston,
Bedfordshire MK42 7BZ
United Kingdom

Tel: +44 (01234) 855855
Fax: +44 (01234) 855800
E-mail: sales@clydesdale.ltd.uk
www.clydesdale.ltd.uk
DS 111 001 REV 2 19/10/06 CB