


THIRD PARTY LV CONDUCTOR SHROUDING

Data Sheet

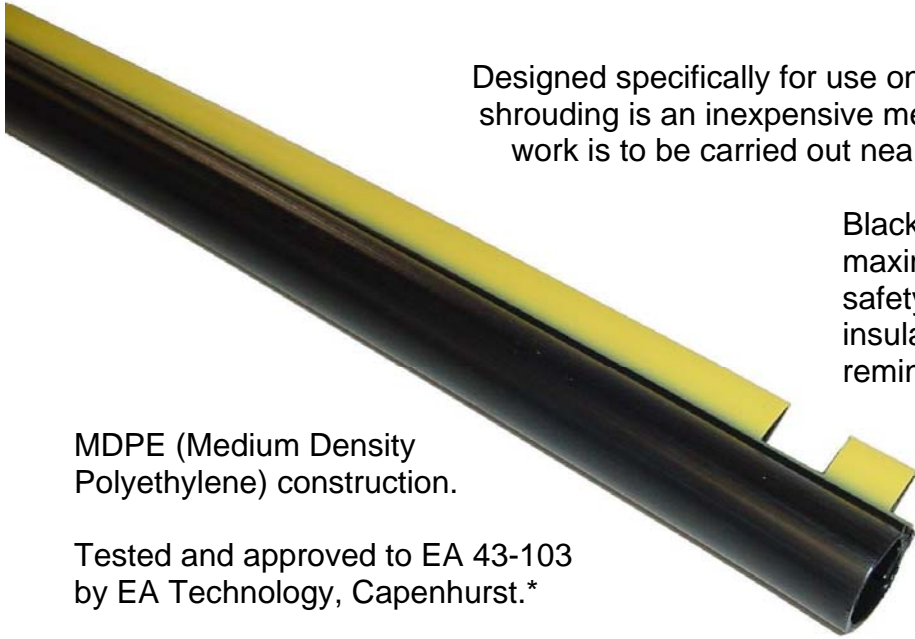

Designed specifically for use on the open wire LV network, this shrouding is an inexpensive method of increasing safety when work is to be carried out near or underneath LV power lines.

Black body with yellow skirt for maximum visibility and double safety, providing not just electrical insulation but also a clear visual reminder of the hazard.

MDPE (Medium Density Polyethylene) construction.

Tested and approved to EA 43-103 by EA Technology, Capenhurst.*



Coupling units are available which allow multiple lengths to be applied.



Cross-Sectional View

Shrouding and couplings are available in the following sizes:

| Part Number | Diameter | Dimension | Weight |
|-------------|----------|-----------|--------|
| 970 1630 | 16mm | 3m Length | 0.8kg |
| 970 1650 | 16mm | 50m Coil | 13.0kg |
| 970 1630A | 16mm | Coupling | <0.1kg |
| 970 2530 | 25mm | 3m Length | 1.0kg |
| 970 2550 | 25mm | 50m Coil | 17.0kg |
| 970 2530A | 25mm | Coupling | <0.1kg |
| 970 5530 | 55mm | 3m Length | 1.2kg |
| 970 5550A | 55mm | Coupling | <0.1kg |

Clydesdale Ltd.

*For compliance exclusions or further details, please contact Clydesdale.

Instal House, 3 Sunbeam Road,
Woburn Road Ind. Est., Kempston,
Bedfordshire MK42 7BZ
United Kingdom

Tel: +44 (01234) 855855
Fax: +44 (01234) 855800
E-mail: sales@clydesdale.ltd.uk
www.clydesdale.ltd.uk
DS 970 CFB 05/05/06 Rev0