

Designed specifically for use on the open wire LV network, this shrouding is an inexpensive method of increasing safety when work is to be carried out near or underneath LV power lines.

Black body with yellow skirt for maximum visibility and double safety, providing not just electrical insulation but also a clear visual reminder of the hazard.




MDPE (Medium Density Polyethylene) construction.

Tested and approved to EA 43-103 by EA Technology, Capenhurst.\*



Cross-Sectional View

Coupling units are available which allow multiple lengths to be applied.

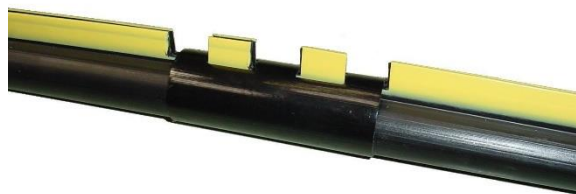

Shrouding and couplings are available in the following sizes:

Part Number	Diameter	Dimension	Weight
975 2503	25mm	3m Length	1.0kg
975 2550	25mm	50m Coil	17.0kg
975 2500	25mm	Coupling	<0.1kg
975 5503	55mm	3m Length	1.2kg
975 5500	55mm	Coupling	<0.1kg