


# BLANKET SHROUDING HV

CLY 558 \*\*\*

Data Sheet

# CLYDESDALE

## Powering the Future

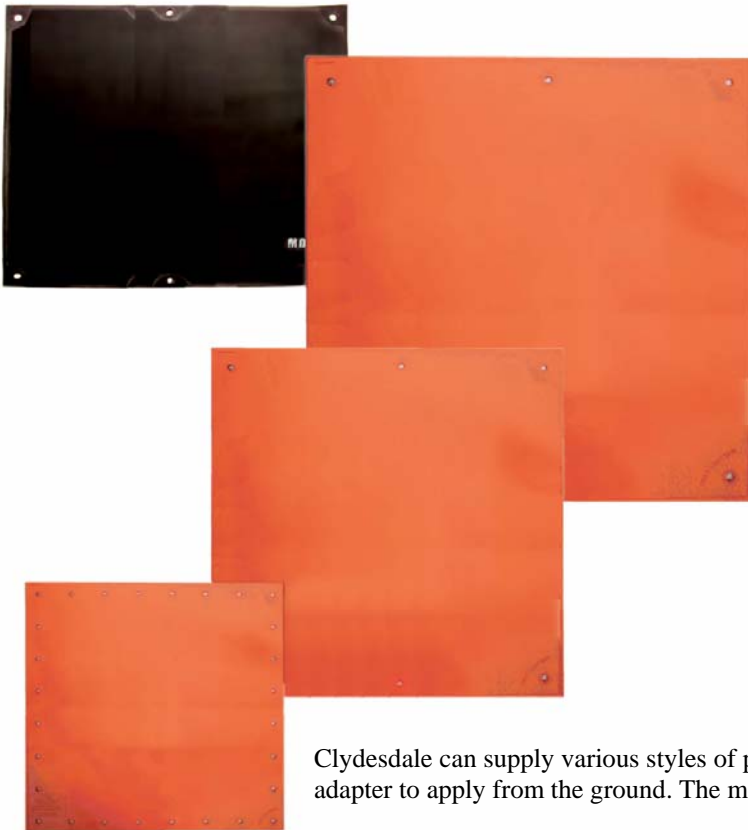

These hot glove type blankets, compliant with ASTM D1048 specifications are available in Class 4 (Max Use 36kV) variants from stock.

There are two principal styles: Solid (rectangular blanket with six eyelets) or Slotted (same as solid but with a keyhole slit from one edge to a central hole to allow placement around insulator pins etc.)

Made of orange SALCOR Type II, a highly flexible corona resistant polymer, the blankets are flexible even in cold weather and are not affected by either ozone or UV rays.

The eyelets and sides are re-inforced with a beaded edge for added strength and tear-resistance.

Part No.	Style	Size	Weight
CLY 558 900-E	Solid	36" x 36"	3.6kg
CLY 558 1300	Slotted	36" x 36"	3.4kg
CLY 558 113	Solid	22" x 22"	1.4kg
CLY 558 15	Slotted	22" x 22"	1.1kg

Clydesdale can supply various styles of plastic clamp pegs also with Hotstick adapter to apply from the ground. The most common are listed below:



Blankets can be stored in either Canisters or Roll Ups when not in use. Canisters are moulded in bright orange, hi-impact polythene. A tight fitting cap is secured to the canister with polypropylene rope to avoid misplacement. Three sizes of canister are available.

**Storage Tips:** When more than one blanket is stored, the most convenient method of loading is to roll and insert each blanket into the canister independently. A single blanket can then be removed without removing the others. For maximum useful life, never fold, crease or compress insulating blankets whilst in storage.

Roll Ups provide a safe and convenient means for protecting blankets while in transport or storage. Ruggedly constructed of 12oz. water resistant cotton duck with 12" side flaps to confine the blankets into position and prevent damage to edges. Two heavy duty web straps with buckles close the roll up, and a double web cross strap serves as a carrying handle.

Part No.	Description	Max Blanket Size / Jaw Opening	Dimensions	Capacity	Weight
CLY 559 21	Clamp Peg	5"	-	-	0.1kg
CLY 559 971 C2	Clamp Peg	1.5"	-	-	0.1kg
CLY 559 P-2	Canister	36" (914mm)	127 x 940mm	2 Blankets	0.9kg
CLY 559 P-4	Canister	36" (914mm)	178 x 940mm	4 Blankets	1.6kg
CLY 559 P-6	Canister	36" (914mm)	229 x 940mm	6 Blankets	2.3kg
CLY 559 36	Roll Up	36" (914mm)	1371 x 1168mm	4 Blankets	1.1kg

Clydesdale Ltd.



Instal House, 3 Sunbeam Road,  
Woburn Road Ind. Est., Kempston,  
Bedfordshire MK42 7BZ  
United Kingdom

Tel: +44 (01234) 855855  
Fax: +44 (01234) 855800  
E-mail: [sales@clydesdale.ltd.uk](mailto:sales@clydesdale.ltd.uk)  
[www.clydesdale.ltd.uk](http://www.clydesdale.ltd.uk)

DS 558 REV 0 25/05/06 CB